

# Technical Data for IS-Max ISMW-Series Mass Flow Meters

0.5 sccm full scale through 1000 SLPM full scale

Standard specifications. Consult Alicat for available options.



+1 (888) 290-6060  
alicat.com/ism

CERTIFICATIONS	MARKING	CERTIFICATE
ATEX	Ex II 1G Ex ia IIC T4 Ga T <sub>amb</sub> -20°C to +70°C	DEKRA 22ATEX0075X
IECEX	Ex ia IIC T4 Ga T <sub>amb</sub> -20°C to +70°C	IECEX DEK 22.0078X
North America	Class I, Div 1, Groups A-D T4, Ex ia Class I, Zone 0, AEx\Ex ia IIC T4 Ga T <sub>amb</sub> -20°C to +70°C	DEKRA 23CAUS40-127215

SENSOR PERFORMANCE			
RANGE	0.5 – 5 SCCM	10 SCCM – 20 SLPM	40 – 1000 SLPM
Mass flow accuracy <sup>1,2</sup>	Standard accuracy: ± 0.8% of reading and ± 0.2% of full scale High accuracy: ± 0.4% of reading and ± 0.2% of full scale (5 SCCM only)	Standard accuracy: ± 0.75% of reading or ± 0.1% of full scale, whichever is greater High accuracy: ± 0.6% of reading or ± 0.1% of full scale, whichever is greater	Standard accuracy: ± 0.8% of reading and ± 0.2% of full scale High accuracy: ± 0.4% of reading and ± 0.2% of full scale
Flow repeatability (2σ)	± 0.2% of reading and ± 0.02% of full scale	± 0.1% of reading and ± 0.02% of full scale	± 0.2% of reading and ± 0.02% of full scale
Pressure accuracy	Above 1 atm: ± 0.5% of reading Below 1 atm: ± 0.07 PSIA		
Flow measurement range	0.01 – 100% of full scale (10,000:1 turndown ratio)		
Operating pressure	11.5 – 60 PSIA		
Pressure sensitivity	Mass flow zero and span shift: ± 0.08% of reading ± 0.02% of full scale per atm from calibration conditions	Mass flow zero shift: ± 0.01% of full scale per atm from tare pressure Mass flow span shift: ± 0.1% of reading per atm from calibration conditions	Mass flow zero and span shift: ± 0.08% of reading ± 0.02% of full scale per atm from calibration conditions
Temperature sensitivity	Mass flow zero shift: ± 0.03% of full scale per °C from tare temperature Mass flow span shift: ± 0.01% of reading per °C from 25°C	Mass flow zero and span shift: ± 0.03% of full scale per °C from 25 °C	
Temperature accuracy	± 0.75 °C		
Relative humidity accuracy <sup>3</sup>	± 1.8 % RH at + 23 °C (0 % RH to 90% RH)		
Relative humidity temperature sensitivity <sup>3</sup>	0.05% RH/ °C (0 °C to + 60 °C)		
Operating temperature range	-20 – 70 °C (ambient and gas)		
Totalizer volume uncertainty	± 0.1% of reading in additional uncertainty		
Sensor response time	< 1 ms		
Typical indication response time	127 ms, user adjustable		
Typical warm-up time	< 1 s		

<sup>1</sup> Stated accuracy is after tare (for mass flow), under equilibrium conditions, includes repeatability and linearity.

<sup>2</sup> High accuracy mass flow readings only available on devices with a full scale range ≥ 5 SCCM and ≤ 500 SLPM.

<sup>3</sup> Relative humidity sensor is an optional feature; accuracy statement valid from 0-50° C, ≤90% RH.

# Technical Data for IS-Max ISMW-Series Mass Flow Meters

0.5 sccm full scale through 1000 SLPM full scale

Standard specifications. Consult Alicat for available options.



+1 (888) 290-6060  
alicat.com/ism

MECHANICAL	
Wetted materials <sup>4</sup>	303 and 316L stainless steel, alumina ceramic, glass, gold, heat-cured epoxy, heat-cured silicone rubber, polyamide, silicon, FKM
Maximum pressure	Damage possible above 200 PSIA common mode pressure. Damage possible by rapid pressure change above 75 PSI differential pressure.
Relative humidity range	0 – 95%, non-condensing
Ingress protection	IP66 rating Dust-tight and protected against strong jets of water
Mounting orientation sensitivity	None
Mounting holes	4× 6-32 UNC threaded $\pm 0.276"$ [7.01 mm]

<sup>4</sup> Alternative elastomer materials available, consult Alicat.

POWER AND COMMUNICATIONS	
Digital output options	RS-232 or RS-485 (both options work with the Alicat ASCII command and control language AND the Modbus RTU industrial protocol)
Digital data update rate	40 Hz at 19200 baud
Analog output options	4 – 20 mA
Analog data update rate	1 kHz
Analog signal accuracy	$\pm 0.1\%$ of full scale additional uncertainty
Interactive display	Monochrome LCD with integrated touchpad and backlight; simultaneously displays mass flow, volumetric flow, temperature, gauge pressure, and absolute pressure
Display update rate	10 Hz
Electrical connection options	DB-15
Power requirements	See DOC-MANUAL-IS-SAFEINSTALLATION

FEATURES	
STP reference conditions	25 °C and 1 atm (default), user-configurable
NTP reference conditions	0 °C and 1 atm (default), user-configurable
Gas Select™	98 user-selectable gases stored internally. Each gas optimized to match NIST's REFPROP 10 gas property calculations across the operating temperature and pressure ranges for highest accuracy.
COMPOSER™	20 user-definable gas mixes. Each mix may have up to 5 gases with 0.01% composition resolution.
Multivariate process measurements	Volumetric flow, mass flow, absolute pressure, gauge pressure, barometric pressure, temperature, totalizer Optional: relative humidity
Totalizer	Measure the total accumulated mass of a particular gas (or gas mixture) that has flowed in a process.

Technical Data for IS-Max ISMW-Series Mass Flow Meters

0.5 sccm full scale through 1000 SLPM full scale


Standard specifications. Consult Alicat for available options.



+1 (888) 290-6060  
alicat.com/ism


RANGE-SPECIFIC TECHNICAL DATA			
Full scale flow	Part Numbers	Pressure drop at full scale when venting air to atmosphere	Recommended process connections <sup>4</sup>
0.5 – 50 sccm	ISMW-AA, ISMW-BA, ISMW-EA, ISMW-FA, ISMW-GA, ISMW-IA, ISMW-LA	0.07 PSID	M5 x 0.8mm female
100 SCCM – 5 SLPM	ISMW-NA, ISMW-OA, ISMW-QA, ISMW-BB, ISMW-EB, ISMW-FB	0.07 PSID	1/8" NPT female
10 SLPM	ISMW-GB	0.08 PSID	1/4" NPT female
20 SLPM	ISMW-IB	0.25 PSID	1/4" NPT female
40 SLPM	ISMW-KB	0.12 PSID	1/2" NPT female
50 SLPM	ISMW-LB	0.14 PSID	3/4" NPT female
100 SLPM	ISMW-NB	0.24 PSID	3/4" NPT female
250 SLPM	ISMW-PB	0.60 PSID	3/4" NPT female
500 SLPM	ISMW-QB	0.39 PSID	3/4" NPT female
1000 SLPM	ISMW-RB	0.24 PSID	2" NPT female

<sup>4</sup> Consult Alicat for available connection options, such as: compression, BSPP, SAE, or Swagelok®-compatible (VCO® and VCR®).

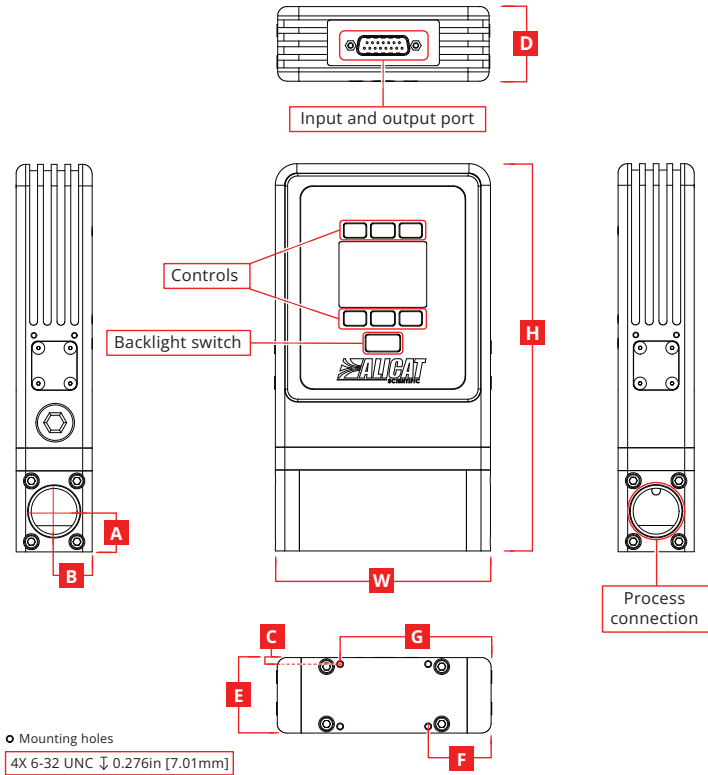

Mounting holes  
4X 6-32 UNC 0.276in [7.01mm]

Representative Examples

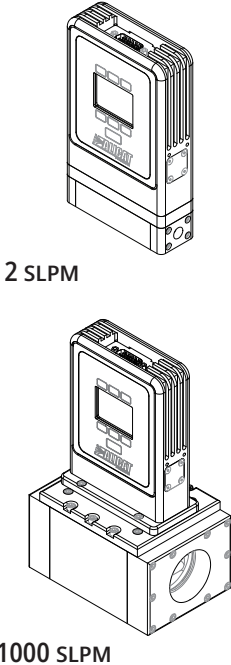

DIMENSIONS										WEIGHT
Full scale flow	Width	Depth	Height	A	B	C	E	F	G	
0.5 SCCM – 2 SLPM	4.25"	1.50"	7.05"	0.50"	0.75"	0.13"	1.35"	1.25"	3.00"	≈ 5.0 lb
	108.0 mm	38.1 mm	179.1 mm	12.7 mm	19.1 mm	3.3 mm	34.2 mm	31.8 mm	76.2 mm	≈ 2.3 kg
5 – 250 SLPM	4.25"	1.50"	7.65"	0.80"	0.75"	0.13"	1.35"	1.25"	3.00"	≈ 6.0 lb
	108.0 mm	38.1 mm	194.3 mm	20.3 mm	19.1 mm	3.3 mm	34.2 mm	31.8 mm	76.2 mm	≈ 2.7 kg
500 SLPM	5.20"	2.90"	8.21"	1.12"	1.45"	0.20"	2.70"	1.35"	3.85"	≈ 9.2 lb
	132.1 mm	73.7 mm	208.4 mm	28.4 mm	36.8 mm	5.1 mm	68.6 mm	34.3 mm	97.8 mm	≈ 4.2 kg
1000 SLPM	5.60"	3.84"	9.18"	1.45"	1.92"	0.30"	3.55"	1.55"	4.05"	≈ 16.2 lb
	142.2 mm	97.5 mm	233.0 mm	36.8 mm	48.8 mm	7.5 mm	90.0 mm	39.4 mm	102.9 mm	≈ 7.3 kg